

HPSBOC series power supply unit




Buffer, switch mode power supply unit 27,6V DC with technical outputs.

EN

CODE: **HPSBOC 3524C** v.1.1/VII
TYPE: **HPSBOC 27,6V/3A/2x17Ah/OC** Buffer, switch mode power supply unit with technical outputs.



GREEN POWER plus



Features:

- DC 27,6V/3A uninterruptible power supply*
- fitting battery: 2x17Ah/12V
- wide range of mains supply: 176÷264V
- high efficiency 83%
- battery charging and maintenance control
- excessive discharging (UVP) protection
- jumper selectable battery charge current 0,5A/1A
- battery output full protection against short-circuit and reverse polarity connection
- LED indication
- EPS technical output indicating AC power loss – OC and relay type
- PSU technical output indicating PSU failure – OC and relay type
- LoB technical output indicating battery low voltage – OC and relay type
- protections:
 - SCP short-circuit protection
 - OVP overvoltage protection
 - overvoltage protection
 - against sabotage
 - overload protection (OLP)
- warranty – 2 year from the production date

DESCRIPTION

A buffer PSU is intended for an uninterrupted supply to devices requiring stabilised voltage of **24V DC (+/- 15%)**. The PSU provides voltage of **U=27,6V DC**. Current efficiency:

1. Output current **3A + 0,5A battery charge***
2. Output current **2,5A + 1A battery charge***

Total device current + battery: 3,5A max*.

In case of power decay, a battery back-up is activated immediately. The PSU is constructed based on the switch mode PSU, with high energy efficiency. The PSU is housed in a metal enclosure (colour RAL 9003) which can accommodate two 17Ah/12V batteries. A micro switch indicates door opening (front cover).

* See chart 1

HPSBOC series power supply unit



Buffer, switch mode power supply unit 27,6V DC with technical outputs.

SPECIFICATIONS	
PSU type	A (EPS - External Power Source)
Mains supply	176÷264V AC
Current up to	0,9A@230VAC
Supply power	100W max.
Efficiency	83%
Output voltage	22V÷27,6V DC – buffer operation 19V÷27,6V DC – battery-assisted operation
Output current $t_{AMB}<30^{\circ}\text{C}$	3A + 0,5A battery charge - see chart 1 2,5A + 1A battery charge - see chart 1
Output current $t_{AMB}=40^{\circ}\text{C}$	2A + 0,5A battery charge - see chart 1 1,5A + 1A battery charge - see chart 1
Voltage adjustment range	24÷28V DC
Ripple	150mV p-p max.
Battery charge current	0,5A or 1A max. @ 2x17Ah ($\pm 5\%$) – jumper selectable
Short-circuit protection SCP	electronic, automatic recovery
Overload protection OLP	105-150% of power supply, automatic recovery
Battery circuit protection SCP and reverse polarity connection	polymer fuse
Surge protection	varistors
Overvoltage protection OVP	>32V (automatic recovery)
Excessive discharge protection UVP:	$U<19\text{V} (\pm 5\%)$ – disconnection of battery terminal
Tampering protection system: - TAMPER – indicating unwanted opening of the PSU's enclosure	- a microswitch, NC contacts (enclosure closed) 0,5A@50V DC (max.)
Technical outputs: - EPS; output indicating AC power failure - PSU; output indicating DC absence/PSU failure - LoB output indicating battery low voltage	- relay type: 1A@ 30VDC/50VAC, time lag: approx. 10s. - OC type, 50mA max., normal status: L (0V) level, failure: hi-Z level, time lag: 10s. - relay type: 1A@ 30VDC/50VAC, - OC type, 50mA max., normal status: L (0V) level, failure: hi-Z level - relay type: 1A@ 30VDC/50VAC, - OC type, 50mA max., normal status: ($U_{BAT} >23\text{V}$): L (0V) level, failure: ($U_{BAT} <23\text{V}$): hi-Z level
LED indication	Yes
Operating conditions	2nd environmental class, $-10^{\circ}\text{C}\div 40^{\circ}\text{C}$
Enclosure	Steel plate, DC01 0,7mm colour: RAL 9003
Enclosure dimensions	405 x 355 x 90+8 [mm] (WxHxD)
Net/gross weight	3,51kg / 3,81kg
Fitting battery	2x17Ah/12V (SLA) max. 380x170x85mm (WxHxD) max
Closing	Cheese head screw x 2 (at the front), (lock assembly possible)
Deklarations, warranty	CE, RoHS, 2 year from the production date
Notes	The enclosure does not adjoin the assembly surface so that cables can be led. PSU cooling: convection. Power-supply: $\Phi 0,63\text{-}2,50$ (AWG 22-10) Outputs: $\Phi 0,63\text{-}2,50$ (AWG 22-10) Battery output BAT: 6,3F-2,5



HPSBOC series power supply unit



Buffer, switch mode power supply unit 27,6V DC with technical outputs.


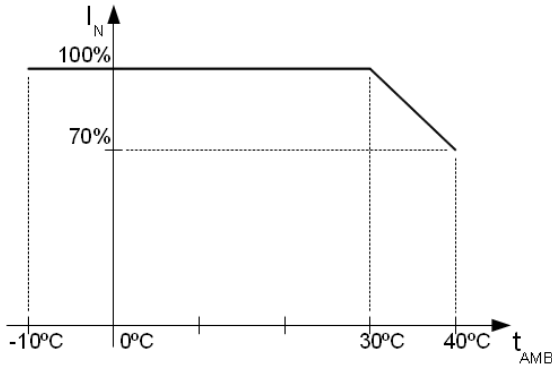


CHART 1. Acceptable output current from the PSU depending on ambient temperature.

Optional configurations:


Buffer power supply unit HPSBOC 27,6V/8x0,3A/2x17Ah.

- HPSBOC3524C + LB 8x0,3A (AWZ577 or AWZ580) + 2x17Ah

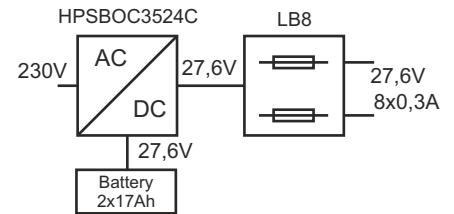


Buffer power supply unit HPSBOC 27,6V/3x1A/2x17Ah.

- HPSBOC3524C + LB4 3x1A (AWZ575 or AWZ576) + 2x17Ah

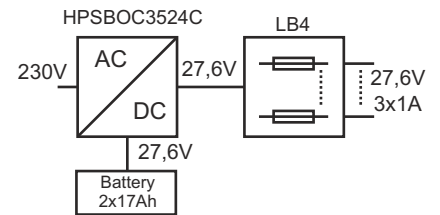


Buffer power supply unit HPSBOC 27,6V/6x0,5A/2x17Ah.

- HPSBOC3524C + LB8 6x0,5A (AWZ578 or AWZ580) + 2x17Ah

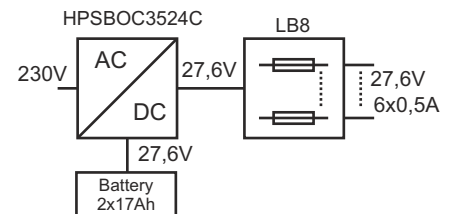

Buffer power supply unit HPSBOC 27,6V/24V/2,5A/2x17Ah.

- HPSBOC3524C + RN25024 (27,6V/24V) + 2x17Ah

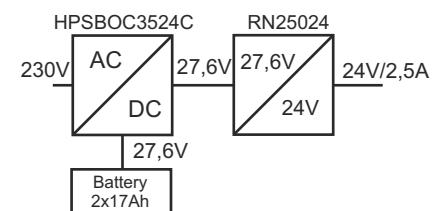


HPSBOC series power supply unit



Buffer, switch mode power supply unit 27,6V DC with technical outputs.


Buffer power supply unit HPSBOC 27,6V/24V/5x0,5A/2x17Ah.

- HPSBOC3524C + RN25024 (27,6V/24V) + LB8 5x0,5A (AWZ578 or AWZ580) + 2x17Ah

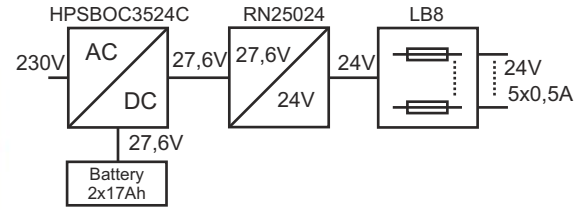


Buffer power supply unit HPSBOC 27,6V/24V/8x0,3A/2x17Ah.

- HPSBOC3524C + RN25024 (27,6V/24V) + LB8 8x0,3A (AWZ577 or AWZ580) + 2x17Ah

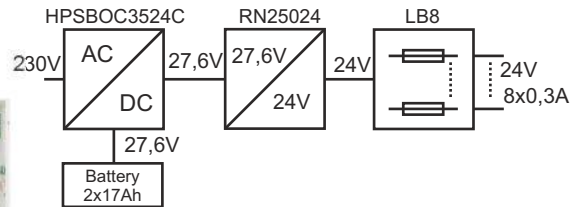

Buffer power supply unit HPSBOC 27,6V/2x5V±18V/2x2A ÷1,3A/2x17Ah.

- HPSBOC3524C + 2xDCDC20 (2x5V±18V/2A÷1,3A) + 2x17Ah

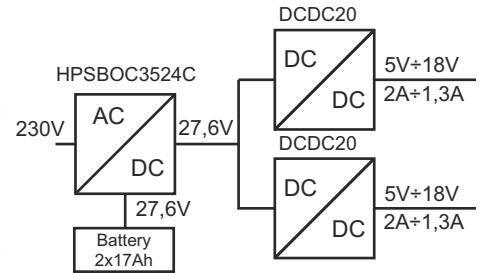

Buffer power supply unit HPSBOC 27,6V/2x5V±18V/2x2A ÷1,3A/8x0,5A/2x17Ah.

- HPSBOC3524C + 2xDCDC20 (2x5V±18V/2A÷1,3A) + 2xLB4 8x0,5A (AWZ574 or AWZ576) + 2x17Ah

