


**CODE:** AWO009 v1.0  
**NAME:** 7/TRP40/DSPR/S

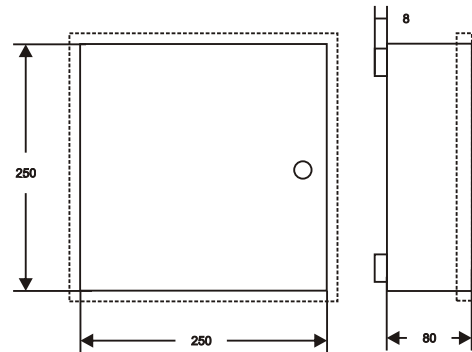

## DESTINATION

**DSC:** PC 1616, 1832, 1864

**MODULES:** 2x (4108, 5108, 5208, 5100, 4116)  
 4204, 4216, 4580, 5400, 5204, 5580, 5200

**PARADOX:** 728ULT, E55, E65, SP4000, SP5500, SP6000, SP7000, EVO48, EVO192

**MODULES:** ZX8, APR3- HUB2, ZX8SP, APR3- ADM2, PGM4

**RISCO:** PRO24

**MODULES:** E04, EZ8, EZ16

**SATEL:** CA4V1, CA5, CA6, CA10, VERSA5, 10, 15, INTEGRA24, 32

**MODULES:** CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS- OC, OPS- R, OPS- ROC, VGM- 16, SR, PTSA)

**PYRONIX:** MATRIX 424, 6

**CROW:** RUNNER 4,8

**TELMOR:** TCA- 824

**SUMMIT:** PENTA

**ROEL:** SIGMA6,12, CERBER

**EBS:** PX202A

## TECHNICAL DATA

**Dimensions:** internal: W=250, H=250, D=80 external: W1=255, H1=255, D1=88mm [mm, +/-2]

**Weight net/gross:** 2,40kg/ 2,55kg [+/-0,1kg]

**Battery space:** 7Ah/12V Sealed Lead Acid (SLA)

**Transformer:** TRP 40VA/16V/18V in the case of PC/ABC in class UL94-V0, IP20

**Power supply:** 230V/AC (-15%/+10%), 50Hz, 200mA (max.)

**Power supply output:** U1=16V/AC or U2=18V/AC (-5%, +15%), I1=2,2A or I2=2,0A (max.)

**Operating environment:** class II , -10°C+ 40°C

**Material description:** sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003

**Destination:** indoor

**Tamper protection:** 1 x microswitch: opening, 0,5A@50V/DC max. NC

**Closing:** screwed x 4

**Notes:** optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal

**Certification, declaration:** CE, RoHS