


CODE: AWO200EI v1.0
NAME: 17/EI40/DSPR/L

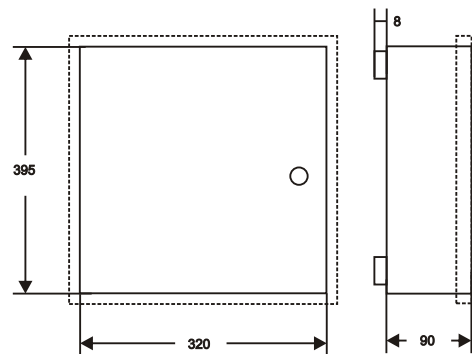

DESTINATION

DSC: (PC 1616, 1832, 1864,4020) + 3x 5108 (4108, 5208, 5100, 4116)

MODULES: (PC 5204, 5400,5200, 5580, 4216,4204) + 3x (5108, 4108, 5100, 4116, 5208)

PARADOX: (E55, E65, 728ULT,EVO48, EVO192, SP4000, SP5500, SP6000, SP7000) + 2 x Z X 8 (Z X 4, APR3- ADM2, APR3-HUB2, PGM4)

RISCO: PRO24, 116, 128, 140+ RP296EPS+ EZ16 (E04, EZ8)

SATEL: CA4V1, CA5, CA6

(VERSA 5, 10, 15, CA10) + 2 x CA10E (CA64E, SM, MST1)

(INTEGRA24, 32) + 2 x CA64E (SM)

MODULES: CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS- OC, OPS- R, OPS- ROC, VGM- 16, SR, PTSA) + 2 x CA64E (SM)

PYRONIX: MATRIX 424, 6, 816, 832, 832+

TEXECOM: PREMIER 412, 816, 832, 48, 88, 168, 640

TELMOR: TCA- 824 + TEX800+ TMT1

ROGER: PR402, CPR 32-SE

EBS: PX202A

PULSAR: MS 1512, MSR 1512, MSRK 1512
 MS 2512, MSR 2512, MSRK 2512

TECHNICAL DATA

Dimensions:	internal: W=320, H=395, D=90 external: W1=325, H1=400, D1=98mm [mm, +/-2]
Weight net/gross:	3,45kg / 3,70kg [+/-0,1kg]
Battery space:	17Ah/12V Sealed Lead Acid (SLA)
Transformer:	EI 40VA/16V/18V
Primary winding	
fuse transformer:	T315mA
Power supply	230V/AC (-15%/+10%), 50Hz, 200mA (max.)
Power supply output:	U1=16V/AC or U2=18V/AC (-5%, +15%), I1=2,2A or I2=2,0A (max.)
Operating environment:	class II , -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC
Closing:	screwed x 4
Notes:	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal
Certification, declaration:	CE, RoHS