


CODE: AWO150 v1.7
NAME: 7/TRP40/DSPR

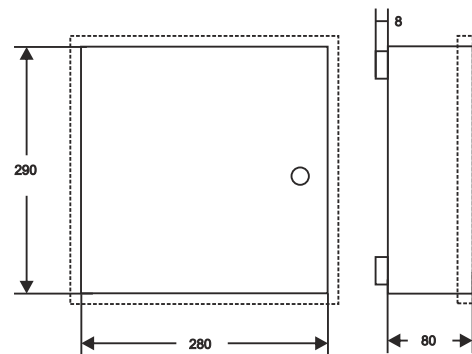

DESTINATION

DSC: (PC 1404, 1616, 1832, 1864,4020)+ 5108 (4108, 5208, 5100, 4116)

MODULES: 3x (4108, 5108, 5208, 5100, 4116)
 1x (4204, 4216, 4580, 5400, 5204, 5580, 5200)

PARADOX: (728ULT, E55, E65, SP5500, SP6000, SP7000, EVO48, EVO192) + ZX8 (ZX4)

MODULES: 2x (ZX8, ZX4, APR3- HUB2)
 1x (APR3-ADM2)

RISCO: PRO24 + EZ16 (EZ04, EZ08)
 PRO116, 128, 140

MODULES: 2x EZ16 (EZ04, EZ08)

SATEL: CA4V1, CA5, CA6
 (VERSA5,10, 15, CA10)+ CA10E (CA64E, SM, MST1)
 (INTEGRA24, 32) + CA64E, (SM)

MODULES: CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS- OC, OPS- R, OPS- ROC, VGM- 16, SR, PTSA) + CA64E (SM)

PYRONIX: MATRIX 424, 6, 816, 832, 832+

CROW: RUNNER 4,8

TELMOR: TCA- 824

ROEL: SIGMA6,12, CERBER

ROGER: PR402, CPR 32- SE

EBS: PX 202A

PULSAR: MS1512, MSR 1512, MSRK 1512
 MS2512, MSR2512, MSRK2512

TECHNICAL DATA

Dimensions:	internal: W=280, H=290, D=80 external: W1=285, H1=295, D1=88mm [mm, +/-2]
Weight net/gross:	2,70kg / 2,85kg [+/-0,1kg]
Battery space:	7Ah/12V Sealed Lead Acid (SLA)
Transformer:	TRP 40VA/16V/18V in the case of PC/ABC in class UL94-V0, IP20
Power supply	230V/AC (-15%/+10%), 50Hz, 200mA (max.)
Power supply output:	U1=16V/AC or U2=18V/AC (-5%, +15%), I1=2,2A or I2=2,0A (max.)
Operating environment:	class II , -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5A@50V/DC max. NC
Closing:	screwed x 4
Notes:	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal
Certification, declaration:	CE, RoHS