

HPSB series power supply unit

Buffer, switch mode power supply unit 27,6V DC




CODE: HPSB 2524B v.1.0/I
TYPE: HPSB 27,6V/2,2A/2x7Ah Buffer, switch mode power supply unit

EN**



GREEN POWER

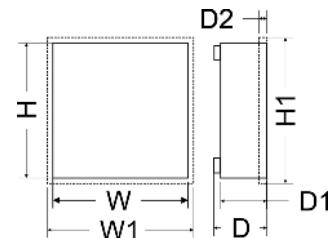

Features:

- DC 27,6V/2,2A uninterruptible power supply*
- fitting battery: 2x7Ah/12V
- wide range of mains supply: 176÷264V
- high efficiency 80%
- battery charging and maintenance control
- excessive discharging (UVP) protection
- battery charge current 0,3A
- battery output full protection against short-circuit and reverse polarity connection
- LED indication
- protections:
 - SCP short-circuit protection
 - OVP overvoltage protection
 - overvoltage protection (input AC)
 - against sabotage
 - overload protection (OLP)
- warranty – 2 year from the production date

DESCRIPTION

A buffer PSU is intended for uninterrupted supply to devices that require stabilised voltage of **24V DC (+/-15%)**. The PSU provides voltage of **U=27,6V DC** with output current of **I=2,2A + 0,3A for battery charge***. In case of power decay, a battery back-up is activated immediately. The PSU is constructed based on the switch mode PSU, with high energy efficiency. The PSU is housed in a metal enclosure (colour RAL 9003) which can accommodate two 7Ah/12V batteries. A micro switch indicates door opening (front cover).

During normal operation, the total current drawn by the equipment may not exceed **I = 2,2A***.

Maximum battery charge current: **0,3 A***.

Total device current + battery: **2,5A max***.

* Refer to chart 1

HPSB series power supply unit



Buffer, switch mode power supply unit 27,6V DC

SPECIFICATIONS

PSU type	A (EPS - External Power Source)
Mains supply	176÷264V AC 50Hz
Current up to	0,72A@230VAC
Supply power	75W max.
Efficiency	80%
Output voltage	27,6V DC – buffer operation 19V÷27,6V DC – battery-assisted operation
Output current $t_{AMB} < 30^{\circ}C$	2,2A + 0,3A battery charge - refer to chart 1
Output current $t_{AMB} = 40^{\circ}C$	1,45A + 0,5A battery charge - refer to chart 1
Voltage adjustment range	24÷28VDC
Ripple	120mV p-p max.
Current consumption by PSU systems	75 mA
Battery charge current	0,3A max. @ 2x 7Ah ($\pm 5\%$)
Short-circuit protection SCP	electronic
Overload protection OLP	U>105% ÷ 150% of power supply, automatic return
Battery circuit protection SCP and reverse polarity connection	PTC polymer fuse
Surge protection	varistors
Oversupply protection OVP	>32V (automatic recovery)
Excessive discharge protection UVP	U<19 V ($\pm 5\%$) – disconnection of battery terminal
Sabotage protection: - TAMPER output indicating enclosure opening	- microswitch, NC contacts (enclosure closed), 0,5A@50V DC (max.)
LED indication	Yes
Operating conditions	2nd environmental class, $-10^{\circ}C \div 40^{\circ}C$
Enclosure	Steel plate DC01, thickness: 0,7mm, colour: RAL 9003
Enclosure dimensions	280 x 292 x 80+8 [mm] (WxHxD)
Net/gross weight	2,1 / 2,3 kg
Fitting battery	2x7Ah/12V (SLA) max. 180x155x75mm (WxHxD) max
Closing	Cheese head screw x 2 (at the front), (lock assembly possible)
Declarations, warranty	CE, RoHS, 2 year from the production date
Notes	The enclosure does not adjoin the assembly surface so that cables can be led. Convectional cooling. Connectors:Power-supply: $\Phi 0,63 \div 2,5$ Battery output BAT: 6,3F-2,5.

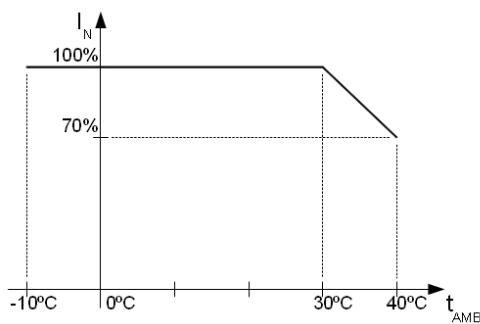


CHART 1. Acceptable output current from the PSU depending on ambient temperature.


HPSB series power supply unit

Buffer, switch mode power supply unit 27,6V DC

Optional configurations:


Buffer power supply unit HPSB 27,6V/2x1A/2x7Ah.

- HPSB2524B + LB2 2x1A (AWZ586) + 2x7Ah

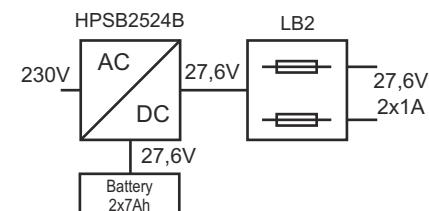


Buffer power supply unit HPSB 27,6V/4x0,5A/2x7Ah.

- HPSB2524B + LB4 4x0,5A (AWZ574 or AWZ576) + 2x7Ah

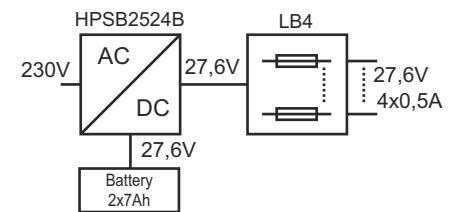



Buffer power supply unit HPSB 27,6V/24V/2,2A/2x7Ah.

- HPSB2524B + RN25024 (27,6V/24V) + 2x7Ah

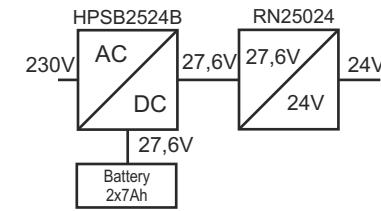


Buffer power supply unit HPSB 27,6V/24V/2x1A/2x7Ah.

- HPSB2524B + RN25024 (27,6V/24V) + LB2 2x1A (AWZ586) + 2x7Ah

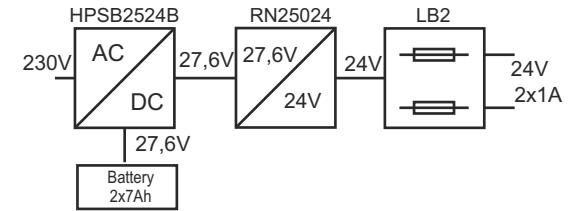

Buffer power supply unit HPSB 27,6V/24V/4x0,5A/2x7Ah.

- HPSB2524B + RN25024 (27,6V/24V) + LB4 4x0,5A (AWZ574 or AWZ576) + 2x7Ah

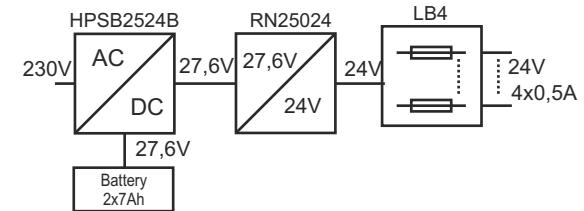

Buffer power supply unit HPSB 27,6V/5V÷18V /2A÷1,3A/2x7Ah.

- HPSB2524B + DCDC20 (5V÷18V/2A÷1,3A) + 2x7Ah

